H125D - 0.500" DIA X 0.125" THICK WITH 0.125" THRUHOLE
D125D - 0.500" DIA X 0.125" THICK
D125C - 0.500" DIA X 0.375" THICK
T250B - 0.250" DIA X 0.250" THICK WITH 0.109" THRUHOLE
C250B - 0.250" LONG X 0.250" WIDE X 0.250" THICK
R250B - 0.250" DIA X 0.250" THICK
D125B - 0.250" DIA X 0.125" THICK
D188B - 0.250" DIA X 0.1875" THICK
D094B - 0.250" DIA X 0.09375" THICK
D063B - 0.250" DIA X 0.0625" THICK
C188A2 - 0.1875" LONG X 0.1875" WIDE X 0.1875" THICK
R188A2 - 0.1875" DIA X 0.1875" THICK
D063A2 - 0.1875" DIA X 0.0625" THICK
D032A1 - 0.15625" DIA X 0.03125" THICK
D040A - 0.125" DIA X 0.040" THICK
D063A-AU - 0.125" DIA X 0.0625" THICK (GOLD PLATED)

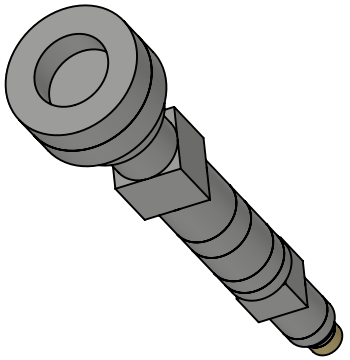

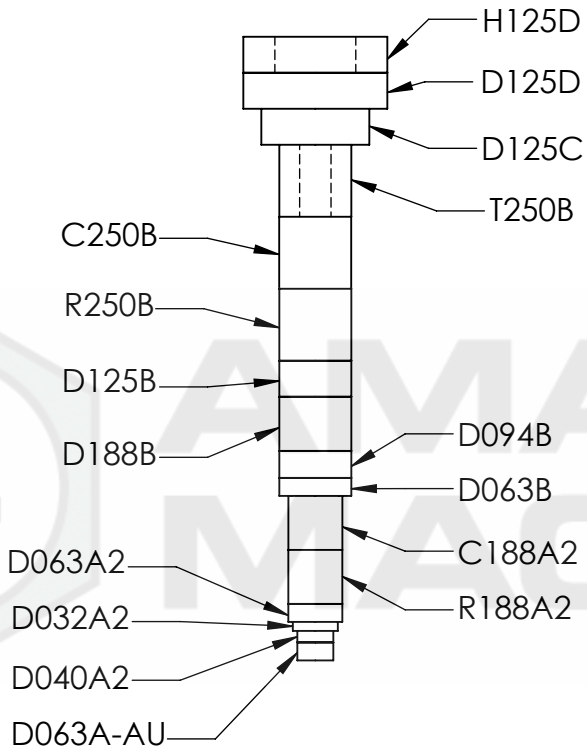

AMAZING MAGNETS®

GRADE: **N40**	**PROPRIETARY AND CONFIDENTIAL**	**UNLESS OTHERWISE SPECIFIED:**	NAME		DATE
MAGNETIZED: **YES**	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMAZING MAGNETS LLC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AMAZING MAGNETS LLC IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: MACH ± 1° TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	DRAWN	LB	1/25/2012
RESIDUAL INDUCTION (Br): **12.5-12.8 KG**			CHECKED	TB	1/25/2012
COERCIVE FORCE (Hc): **≥ 11.4 KOe**		MATERIAL: **NdFeB**	COMMENTS: ALL EDGES BROKEN 0.025 MAX		
INTRINSIC COERCIVE FORCE (Hci): **≥ 12.0 KOe**					
MAX. ENERGY PRODUCT (BHmax): **38-41 MGOe**	CAGE CODE **4R1R7**	FINISH: **Ni-Cu-Ni** (silver in Color)			
MAX OPERATIONAL TEMP: **80C / 176F**		DO NOT SCALE DRAWING			

AMAZING MAGNETS®

TITLE: SAMPLEPAK

SIZE	DWG. NO.	REV
A	SAMPLEPAK-SPECS	0

SCALE 3 : 2

5 4 3 2 1